


	TGF 7400	TGF 9400
A (mm/in)	665÷865/26.2÷34.1	665 ÷ 865
B (mm/in)	1530/60.2	1530/60.2
C (mm/in)	1145/45.1	1190/46.9
D (mm/in)	3340÷3540/131÷139	3385÷3585/133÷141
E (mm/in)	2200/86.6	2200/86.6
F (mm/in)	1650/65	1650/65
G (mm/in)	1900/74.8	1900/74.8

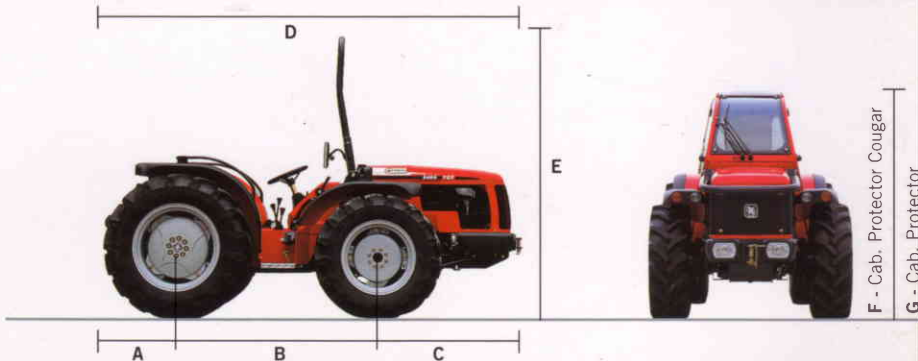

TGF 7400

TGF 9400

Chassis	"ACTIO" – Full chassis with oscillation • Front Steering • 4 wheel drive					
Engine type	Direct Injection Diesel					
N. Cylinders	4			4 Turbo		
Displacement (CC)	2970			2776		
Output kW/HP ECE R24	50/68			61/83		
Maximum rpm	2600			2600		
Peak torque (Nm/g)	214/1400			290/1400		
Cooling	Water			Water		
Tank Capacity (litres/gal)	50/11			60/13		
Transmission	Synchronised 32 speed gear box: 16 forward and 16 reverse with synchronised reverser					
PTO	Rear, independent with progressive hydraulic engagement 540/540E rpm and ground speed PTO					
Shaft	Profile 1" 3/8 with 6 grooves with assisted connection					
Hydraulic power lift	Position and draft control with 3 point hitch					
Pressure (bar)	160					
Capacity (N/Kg-N/lbs)	22540/2300 - 22540/5070					
Steering	Hydraulic with 2 cylinders					
Brakes	Service brakes: on 4 wheels disk brakes in oil bath with hydraulic engagement					
	Steering brakes: on the rear wheels					
	Emergency and parking brakes: band type on transmission					
Tyres front	8.25-16	250/80-16	250/80-18	11.5/80-15.3	11.2R20	320/70R20
Rear	11.2R20	320/70R20	12.4R20	360/70R20	12.4R24	360/70R24
Minimum Outer Width (mm/in)	1245/49	1360/53.5	1380/54.3	1455/57.3	1415/55.7	1475/58.1
Ground Clearance (mm/in)	255/10	255/10	275/10.8	275/10.8	330/13	330/13
Weight (Kg/lbs)	2000÷2180/4410÷4810			2020÷2200/4450÷4850		
Standard Features	Front or front/rear differential locks with hydraulic control • Hydraulically controlled disengagement of front differential • Hydraulic system with 2 separate hydraulic pumps • Hydraulically controlled transmission clutch • Adjustable steering wheel • Lifting bar with quick release couplings • Adjustable, suspension seat • Foldable safety frame • Rear, adjustable height mudguards • Platform suspended on Silent Block • 2 lever rear ancillary hydraulic system • Rear adjustable height tow hitch • Front tow hitch • Multifunctional instruments • Battery • Electrical trailer connection • Safety features on the reverser and PTO.					
Options	2 cabs: "Protector" and "Protector Cougar", pressurised and with air control • HI-LO system which can be electrohydraulically engaged when loaded thus reducing set speeds by 20% (64 speeds, 32 forward and 32 reverse) • Front hydraulic taps • Seat with pneumatic suspension • Front power lift • Power lift with hydraulic 3rd point and vertical adjusting links • Adjustable lifting bar • Slider trailer hook • Front ballast with hitch • Cast iron wheel centre rear wheels • Multifunctional dashboard with digital ground speed and PTO rpm indication.					