


**TRG 9400 / TRG 10400**

A (mm/in)	785/30.9
B (mm/in)	1618/63.6
C (mm/in)	1136/44.7
D (mm/in)	3539/139.0
E (mm/in)	2280÷2335/89.8÷91.9
F (mm/in)	2240÷2295/88.2÷90.3

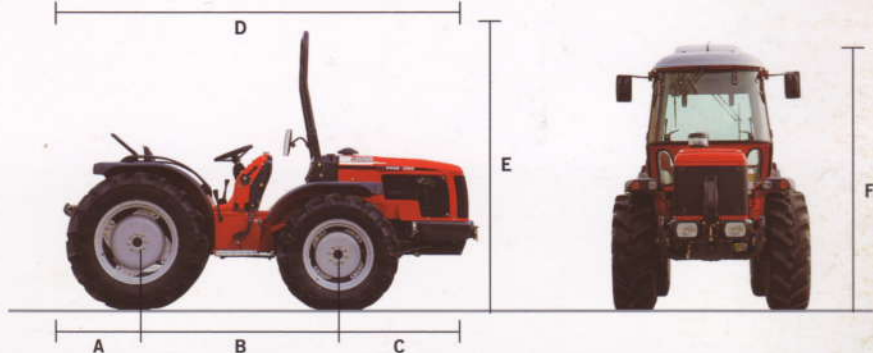

**TRG 9400**

**TRG 10400**

<b>Chassis</b>	"ACTIO" – Full chassis with oscillation • Steering wheels • 4 unequal wheel drive • Reversibility RGS		
<b>Engine Type</b>	Diesel Direct Injection		
<b>N° Cylinders</b>	4 Turbo	4 Turbo	
<b>Displacement (CC)</b>	2776	3000	
<b>Power kW/HP (97/68/CE)</b>	62,5/85	70/95	
<b>Maximum engine revs</b>	2600	2600	
<b>Torque max (Nm/revs)</b>	290/1400	340/1300	
<b>Cooling</b>	Water	Water	
<b>Tank Capacity (litres/gal)</b>	60/13	60/13	
<b>Transmission</b>	Synchronised 32 speed gear box: 16 forward and 16 reverse with synchr. inverter		
<b>PTO</b>	Rear, independent and synchronised at 540/540E rpm with progressive electrohydraulic engagement		
<b>Shaft</b>	Profile 1" 3/8 with 6 splines with facilitated engagement		
<b>Transmission clutch</b>	Hydraulic control		
<b>Drive disengagement</b>	Electro-hydraulic control on the front		
<b>Hydraulic Lift</b>	Position and draft control with 3 point hitch		
<b>Operating Pressure (bar)</b>	160		
<b>Capacity (N/Kp-N/lbs)</b>	20580/2100 - 20580/4630		
<b>Steering</b>	Hydraulic with 2 pistons		
<b>Brakes</b>	Standard: Hydraulic front and rear disk brakes in oil bath Independent rear steering brakes. Emergency and parking: band type on transmission		
<b>Platform</b>	Suspended on Silent Block		
<b>Tyres: Front</b>	11.2 R20	320/70 R20	11.5/80-15.3
<b>Rear</b>	320/85 R24	360/70 R24	360/70 R20
<b>Minimum outer width (mm/in)</b>	1415/55.7	1475/58.1	1545/60.8
<b>Ground clearance (mm/in)</b>	410/16.1	410/16.1	275/10.8
<b>Weight in order of speed:</b>			
<b>With roll bar (Kg/lbs)</b>	2080/4590	2100/4630	
<b>With cab (Kg/lbs)</b>	2220/4850	2240/4940	
<b>Standard Features</b>	Reversible control tower • Rear or front/rear differential locks with electrohydraulic control • Hydraulic system with 2 separate hydraulic pumps • Adjustable steering wheel • Lifting bar with quick release couplings • Adjustable, suspension seat • Safety Belts • Foldable safety roll bar • Adjustable wheel disks • 3 lever rear ancillary hydraulic system • Rear adjustable height tow hitch • Front tow hitch • Multifunctional digital instruments for Km/h and PTO • Battery • Electrical power point • Safety starting device on the inverter and PTO • Bigger lifting cylinders		
<b>Optional extras</b>	HI-LO system which can be electro-hydraulically engaged when loaded thus reducing set speeds by 20% (64 speeds, 32 forward and 32 reverse) • Star Light cab with heating and air conditioning system, window on the roof, fitted on Silent Blocks • Lifting and hydraulic outlets controlled by "ON/OFF" or "Proportional" Joystick • Electronic position and draft control lift • Power lift with hydraulic 3rd point and vertical adjusting links • Front power lift • Front PTO 1000 rpm with electro-hydraulic engagement • Oscillating tow bar • Support with six complete ballast weights • Cast iron wheel centre for 20" and 24" rear wheels • Slider tow hitch • Pneumatic seat (adjustable via electric switch) • Up to five types of front hydraulic system with a maximum of ten quick release hydraulic tappets		